

Tompkins County ADA Transition Plan - 2017

Based on the 2010 ADA Standards for Accessible Design

Project: Tompkins County Transition Plan 2017

Building: Old Jail

Location: 125 E. Court Street, Ithaca, NY 14850

Date: March 2, 2017

Surveyor(s): Alan Lockett – Assistant Director of Facilities



ADA Checklist for Existing Facilities

Priority 1 – Approach & Entrance

Based on the 2010 ADA Standards for Accessible Design



All facilities should have at a minimum an accessible route to a main building entrance.




Institute for Human Centered Design
www.HumanCenteredDesign.org 2014



ADA National Network
www.ADAchecklist.org


Priority 1 – Approach & Entrance			Comments
1.1	Is there at least one route from site arrival points (parking, passenger loading zones, public sidewalks and public transportation stops) that does not require the use of stairs?	Yes	Sidewalks and public transportation are available.
1.2 – 1.13	If parking is provided for the public, are an adequate number of accessible spaces provided? [208.2]	NA	There is no public parking.
Curb Ramps			
1.14	If the accessible route crosses a curb, is there a curb ramp? [402.2]	Yes	At road intersections.
1.15	Is the running slope of the curb ramp no steeper than 1:12, i.e. for every inch of height change there are at least 12 inches of curb ramp run? [406.1, 405.2]	Yes	
1.16	Is the curb ramp, excluding flares, at least 36 inches wide? [406.1, 405.5]	Yes	
Ramps <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			
1.17 – 1.28	If there is a ramp is it at least 36 inches wide? [405.5]	NA	There are no ramps.
Entrance			
1.29	Is the main entrance accessible?	Yes	
1.30	If the main entrance is not accessible, is there an alternative accessible entrance? Can the alternative accessible entrance be used independently and during the same hours as the main entrance?	No No	The only accessible entrance is the main entrance. That is also the only public entrance to the building.
1.31	Do all inaccessible entrances have signs indicating the location of the nearest accessible entrance? [216.6]	Yes	Exception; blocked entrance.
1.32	If not all entrances are accessible, is there a sign at the accessible entrance with the International Symbol of Accessibility? [216.6]	NA	

1.33	Is the clear opening width of the accessible entrance door at least 32 inches, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3]	Yes Measurement: 36"	
1.34	If there is a front approach to the pull side of the door, is there at least 18 inches of maneuvering clearance beyond the latch side plus at least 60 inches clear depth?	Yes Measurement:	
1.35	If the threshold is vertical is it no more than 1/2 inch high?	Yes Measurement: 1/2"	
1.36	Is the door equipped with hardware that is operable with one hand and doesn't require firm grasping, pinching or twisting the wrist?	Yes	<p>U-pull type.</p> 
1.37	Are the operable parts of the door hardware no less than 34 inches and no greater than 48 inches above the floor or ground surface? [404.2.7]	Yes Measurement: 35" - 45"	
1.38	If the door has a closer, does it take at least 5 seconds to close from an open position of 90 degrees [404.2.8]	Yes Measurement: 5 seconds	
1.39	If there are two doors in a series, e.g. vestibule, is the distance between the doors at least 48 inches.	NA	
1.40	If provided at the building entrance, are carpets or mats no higher than 1/8 inch thick? [302.2]	Yes Measurement: 1/8"	

ADA Checklist for Existing Facilities

Priority 2 – Access to Goods & Services

Based on the 2010 ADA Standards for Accessible Design

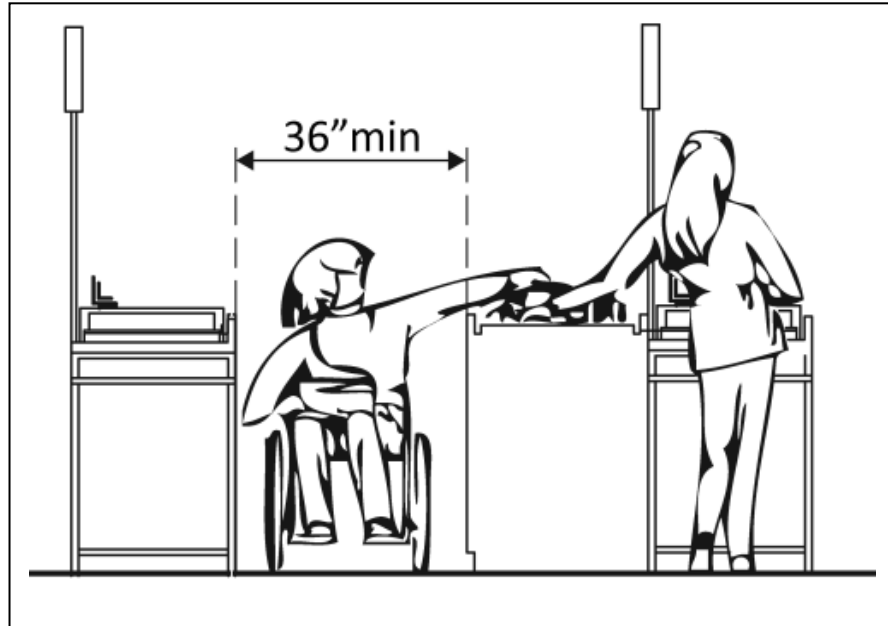

The layout of the building should allow people with disabilities to obtain goods and services and to participate in activities without assistance.





Institute for Human Centered Design
www.HumanCenteredDesign.org 2014



ADA National Network
www.ADAchecklist.org

Priority 2 – Access to Goods & Services			Comments
2.1	Does the accessible entrance provide direct access to the main floor, lobby and elevator? [See 2010 ADA Standards for Accessible Design – 206.4]	Yes	
Interior Accessible Route			
2.2	Are all public spaces on at least one accessible route? [206.2.4]	Yes	
2.3	Is the route stable, firm and slip-resistant? [40.2, 302.1]	Yes	
2.4	Is the route at least 36 inches wide? [403.5.1] Note: The accessible route can narrow to 32 inches min. for a max. of 24 inches. These narrower portions of the route must be at least 48 inches from each other.	Yes Measurement: minimum 56"	
2.5	If the route is greater than 200 feet in length and less than 60 inches wide, is there a passing space no less than 60 x 60 inches? [403.5.3]	NA	
2.6	Is the running slope no steeper than 1:20, i.e. for every inch of height change there are at least 20 inches of route run? [403.3]	NA	
2.7	Is the cross slope no steeper than 1:48? [403.3]	NA	
2.8	Do all objects on circulation paths through public areas, e.g. fire extinguishers, drinking fountains, signs, etc., protrude no more than 4 inches into the path? [307.4]	Yes	
2.9	Are there elevators or platform lifts to all public stories?	Yes	Elevator
Ramps <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			
2.10– 2.21	If there is a ramp, is it at least 36 inches wide? [405.5]	NA	
Elevators – Full Size & LULA (limited use, limited application) <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO			
2.22	If there is a full size or LULA elevator, are the call buttons no higher than 54 inches above the floor? [407.2.1.1]	Yes Measurement: 42"	

2.23	If there is a full size or LULA elevator, does the sliding door reopen automatically when obstructed by an object or person?* 407.3.3]	Yes	
2.24	If there is a full size elevator: Is the interior at least 54 inches deep by at least 36 inches wide with at least 16 sq. ft. of clear floor area? Is the door opening width at least 32 inches? [407.4.1 Exception]	Yes No Measurement: 68" D x 52" W Yes Measurement: 36"	
2.25	If there is a LULA elevator, is the interior: At least 51 inches deep by 51 inches wide with a door opening width of at least 36 inches?	NA	
2.26	If there is a full size or LULA elevator, are the in-car controls: No less than 15 inches and no greater 48 inches above the floor? Or Up to 54 inches above the floor for a parallel approach? [408.4.6, 407.4.6.1]	Yes Measurement: 35" – 46"	
2.27	If there is a LULA elevator, are the in-car controls centered on a side wall? [408.4.6]	NA	
2.28	If there is a full size or LULA elevator: Are the car control buttons designated with raised characters? Are the car control buttons designated with Braille? [407.4.7.1, 703.2]	Yes Yes	

2.29	If there is a full size or LULA elevator, are there audible signals which sound as the car is about to stop at a floor? [407.4.8]	Yes	
2.30	<p>If there is a full size or LULA elevator:</p> <p>Is there a sign on both door jambs at every floor identifying the floor?</p> <p>Do text characters contrast with their backgrounds?</p> <p>Are text characters raised and Braille?</p>	<p>Yes</p> <p>Yes</p> <p>Yes</p>	Gold on black.
Platform Lifts <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			
2.31	If a lift is provided, can it be used without assistance from others? [410.1]	NA	
Signs "Tactile characters" are read using touch, i.e. raised characters and Braille.			
2.32	<p>If there are signs designating permanent rooms and spaces [216.2]</p> <p>Do text characters contrast with their backgrounds? [703.5]</p> <p>Are text characters raised / Braille? [703.2]</p>	<p>Yes</p> <p>Yes</p> <p>Yes</p>	
2.33	<p>If there are signs that provide direction to or information about interior spaces:</p> <p>Do text characters contrast with their backgrounds? [703.5.1]</p> <p>Is the sign mounted so that characters are at least 40 inches above the floor? [703.5.6]</p>	<p>Yes</p> <p>Yes</p>	

Interior Doors – Scott Heyman Conference Rooms.

2.34	Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3]	Yes Measurement: 56" per leaf	There's a double door entry into the conference room. Opening both leafs provides more than enough clearance for a wheelchair.
2.35	If there is a front approach to the pull side of the door, is there at least 18 inches of maneuvering clearance beyond the latch side plus at least 60 inches clear depth?	No Measurement: 0"	No pull side clearance however with both door leafs open, pull side clearance is not needed for wheelchair entry.
2.36	Is the threshold no more than ¾ inch high with the top ½ inch beveled no steeper than 1:2, [404.2.5, 303.2]	NA	No threshold – carpet.
2.37	Is the door equipped with hardware that is operable with one hand and does not require tight grasping, pinching or twisting of the wrist? Door handle?	Yes Yes	Lever type.
2.38	Are the operable parts of the hardware no less than 34 inches and no greater than 48 inches above the floor? [404.2.7]	Yes Measurement: 35 ½"	
2.39	Can the door be opened easily (5 pounds maximum force)? [404.2.9]	Yes	
2.40	If the door has a closer, does it take at least 5 seconds to close from an open position of 90 [404.2.8.1]	Yes No Measurement: 6 seconds	


Rooms and Spaces

2.41	Are aisles and pathways to and services, and to one of each type of sales and service counters, at least 36 inches wide? [403.5.1]	Yes Measurement: 56"	
2.42	Are floor surfaces stable, firm and slip resistant? [302.1]	Yes	
2.43	If there is carpet: Is it no higher than ½ inch?	Yes	

Controls – light switches, security and intercom systems, emergency/alarm boxes, etc.

<p>2.44</p>	<p>Is there a clear floor space at least 30 inches wide by at least 48 inches long for a forward or parallel approach? [305.3]</p> <p>Are the operable parts no higher than 48 inches above the floor?*[309.3, 308]</p>	<p>Yes</p> <p>Yes</p>	
<p>2.45</p>	<p>Can the control be operated with one hand and without tight grasping, pinching, or twisting of the wrist? [309.4]</p>	<p>Yes</p>	


Seating – Scott Heyman Conference Rooms, Personnel area.

<p>2.46</p>	<p>Are at least 5%, but no fewer than one, of seating and standing spaces accessible for people who use wheelchairs? [226.1]</p>	<p>Yes</p>	<p>No fixed seating.</p> 
<p>2.47</p>	<p>Is there a route at least 36 inches wide to accessible seating? [403.5.1]</p>	<p>Yes</p>	
<p>2.48</p>	<p>At the accessible space(s), is the top of the accessible surface no less than 28 inches and no greater than 34 inches above the floor? [902.3]</p>	<p>Yes</p>	
<p>2.49</p>	<p>If there is a check writing surface, is the top no less than 28 inches and no greater than 34 inches above the floor? [904.3.3]</p>	<p>Yes</p>	<p>Finance dept. has a desk in the hallway that can be used for check writing if needed.</p>

The ADA Checklist for Existing Facilities

Priority 3 - Toilet Rooms

Based on the 2010 ADA Standards for Accessible Design

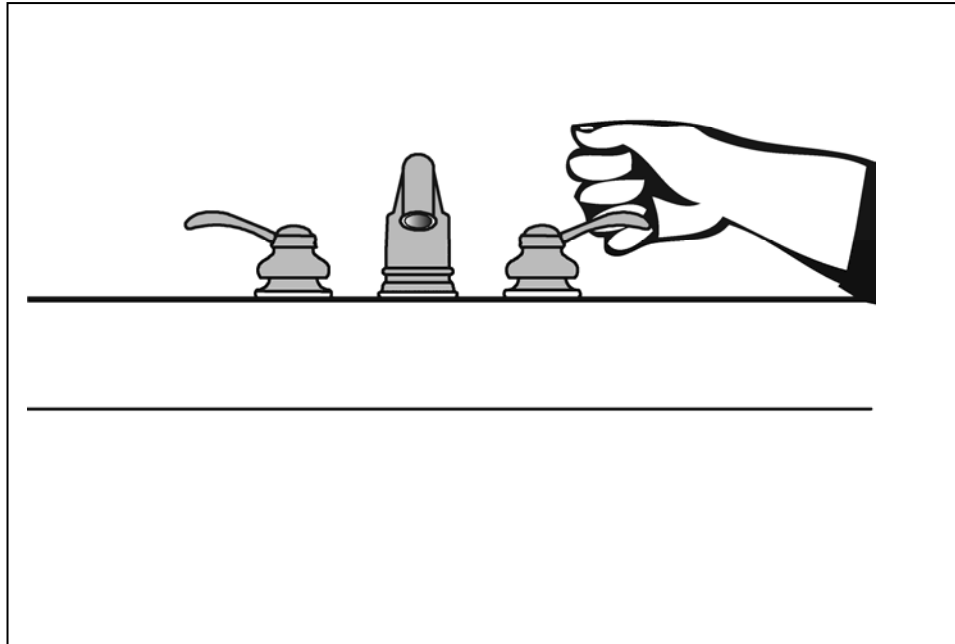


When toilet rooms are open to the public they should be accessible to people with disabilities.



Institute for Human Centered Design
www.HumanCenteredDesign.org 2014



ADA National Network
www.ADAchecklist.org

Priority 3 – Toilet Rooms			Comments
3.1	If toilet rooms are available to the public, is at least one toilet room accessible? (Either one for each sex, or one unisex.)	Yes	Single use unisex accessible toilet room on the first floor, and two single use toilet rooms in the basement level. One for adults and one for children.
3.2	Are there signs at inaccessible toilet rooms that give directions to accessible toilet rooms?	No	All are accessible.
Accessible Route			
3.3	Is there an accessible route to the accessible toilet room? [206.2.4]	Yes	
Signs at Toilet Rooms			
3.4	Do text characters contrast with their backgrounds? [703.5]	Yes	
	Are text characters raised? [703.2]	Yes	
	Is there Braille? [703.3]		
	Is the sign mounted latch side of the door? [703.4.2]	Yes	
Entrances			
3.5	Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3]	Yes Measurement: 35"	
3.6	If there is a front approach to the pull side of the door is there at least 18 inches of maneuvering clearance beyond the latch side plus 60 inches clear depth?	Yes	

3.7	If the threshold is vertical is it no more than ¾ inch high with the top ½ inch beveled no steeper than 1:2	Yes Measurement: ½"	
3.8	Is the door equipped with hardware that is operable with one hand and does not require tight grasping, pinching or twisting of the wrist?	Yes	Lever type.
3.9	Are the operable parts of the door hardware mounted no less than 34 inches and no greater than 48 inches above the floor? [404.2.7]	Yes No Measurement: 35 ½"	
3.10	Can the door be opened easily (5 pounds maximum force)? [404.2.9]	Yes	
3.11	If there are two doors in a series, e.g. vestibule, is the distance between the doors at least 48 inches [404.2.6]	NA	
3.12	If there is a privacy wall and the door swings out, is there at least 24 inches of maneuvering clearance beyond the door latch side and 42 inches to the privacy wall? [404.2.4]	NA	
3.13	If there is a privacy wall and the door swings in, is there at least 24 inches of maneuvering clearance beyond the door latch side and at least 48 inches to the privacy wall if there is no door closer or at least 54 inches if there is a door closer? [404.2.4]	NA	
Toilet Room Accessories			
3.14	Is there a clear path to at least one of each type of fixture, e.g. lavatory, hand dryer, etc., that is at least 36 inches wide?[403.5.1]	Yes	
3.15	Is there clear floor space available for a person in a wheelchair to turn around, i.e. a circle at least 60 inches in diameter or a T-shaped space within a 60-inch square? [603.2.1]	Yes Measurement: 90"L x 66"W	Measured at unisex toilet room on first floor.
3.16	If the mirror is over a lavatory or countertop, is the bottom edge of the reflecting surface no higher than 40 inches above the floor? surface no higher than 35 inches above the floor?*[603.3]	No Measurement: 47"	Mirror is tilted toward user in unisex toilet room.

3.17	If there is a coat hook, is it no less than 15 inches and no greater than 48 inches above the floor?* [603.4]	No Measurement: 62"	Install second, lower coat hook in unisex toilet room .
-------------	---	----------------------------	---

Toilet Rooms

3.18	Does at least one lavatory have a clear floor space for a forward approach at least 30 inches wide and 48 inches long? [606.2]	Yes	
-------------	--	-----	--


3.19	Are pipes below the lavatory insulated or otherwise configured to protect against contact? [606.5]	Yes	However insulation is in poor condition at unisex toilet room and should be replaced.
-------------	--	-----	---

3.20	Can the faucet be operated without tight grasping, pinching, or twisting of the wrist?	Yes	
-------------	--	-----	--

Soap Dispensers and Hand Dryers

3.21	Are the operable parts of the soap dispenser, paper towels, hand dryer No higher than 48 inches above the floor? [308.2.2]	Yes	
-------------	--	-----	--

Water Closets in Single-User Toilet Rooms

3.22	Is the centerline of the water closet no less than 16 inches and no greater than 18 inches from the side wall or partition? [604.2]	Yes Measurement: 18"	 <p style="text-align: center;">Unisex Toilet Room 1st Floor 1</p>
-------------	---	-----------------------------	---

3.23	Is the height of the water closet no less than 17 inches and no greater than 19 inches above the floor measured to the top of the seat? [604.4]	Yes Measurement: 19"	
3.24	If the flush control is hand operated, can it be operated with one hand and without tight grasping, pinching, or twisting of the wrist?	Yes	Lever type.
3.25	Is the flush control on the open side of the water closet? [604.6]	Yes	
3.26	Is the toilet paper dispenser at front of the water closet and easily accessible [604.7]	Yes	
3.27	Does the dispenser allow continuous paper flow? [604.7]	Yes	
Toilet Compartments (Stalls)			
3.28 - 3.35	Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [604.8.1.2]	NA	None of the three public toilet rooms in this building have stalls.

ADA Checklist for Existing Facilities

Priority 4 – Additional Access

Based on the 2010 ADA Standards for Accessible Design



The layout of the building should allow people with disabilities to obtain goods and services and to participate in activities without assistance.



Institute for Human Centered Design
www.HumanCenteredDesign.org 2014



ADA National Network
www.ADAchecklist.org

Priority 4 – Additional Access		Comments	
4.1	Does at least one drinking fountain have a clear floor space at least 30 inches wide x at least 48 inches long centered in front of it for a forward approach?*[See 2010 ADA Standards for Accessible Design – 602.2]	NA	No drinking fountains or water coolers for the public.
4.2	Can the control be operated with one hand and without tight grasping, pinching or twisting of the wrist?	NA	
4.3	Is the spout outlet no higher than 36 inches above the floor? [602.4]	NA	
4.4	If there is more than one drinking fountain, is there at least one for standing persons? [211.2]	NA	
4.5	If there are fire alarm systems, do they have both flashing lights and audible signals? [702.1]	Yes	

ADA Checklist for Existing TC Facilities

Summary of items that could be improved.

Building:

Date Inspected:

Priority 1

Item	Correction	Target Date	Date Completed
1.38	Adjust closer on main entrance door		
3.19	Replace insulation at sink in unisex toilet room		

Priority 2

Item	Correction	Target Date	Date Completed
None			

Priority 3

Item	Correction	Target Date	Date Completed
3.17	Install second coat hook on door.		

Priority 4

Item	Correction	Target Date	Date Completed
None			